



## Product Data Sheet

### **AMBERLITE™ PWA5 Ion Exchange Resin**

Drinking Water-grade Resin for Selective Nitrate Removal

#### **Description**

AMBERLITE™ PWA5 Ion Exchange Resin is a strongly basic anion exchange resin developed for selective nitrate removal from drinking water. AMBERLITE™ PWA5 removes nitrate preferentially to sulfate and, therefore, can yield operating capacity higher than conventional resins. These characteristics make AMBERLITE™ PWA5 the perfect choice for a simple, regenerable, nitrate removal process for municipal water treatment.

AMBERLITE™ PWA5 is compatible with packed bed systems.

#### **Applications**

Primary application:

- Selective nitrate removal

Also can be used for:

- Selenium removal
- Chlorate removal
- Perchlorate removal

#### **Typical Properties**

---

<b>Physical Properties</b>	
Copolymer	Styrene-divinylbenzene
Matrix	Macroporous
Type	Strong base anion
Functional Group	Triethylamine
Physical Form	Cream, opaque, spherical beads

---

<b>Chemical Properties</b>	
Ionic Form as Shipped	Cl <sup>-</sup>
Total Exchange Capacity	≥ 0.9 eq/L
Water Retention Capacity	52 – 58%

---

<b>Particle Size</b> §	
Particle Diameter	650 – 850 µm
Uniformity Coefficient	≤ 1.5
< 300 µm	≤ 0.3%
> 1180 µm	≤ 5.0%

---

<b>Density</b>	
Shipping Weight	690 g/L

---

§ For additional particle size information, please refer to the [Particle Size Distribution Cross Reference Chart](#) (Form No. 177-01775).

## Suggested Operating Conditions

Maximum Operating Temperature	40°C (104°F)
pH Range	
Service Cycle	5 – 8
Stable	0 – 14


## Hydraulic Characteristics

Estimated bed expansion of AMBERLITE™ PWA5 Ion Exchange Resin as a function of backwash flowrate and temperature is shown in Figures 1a and 1b.

Estimated pressure drop for AMBERLITE™ PWA5 as a function of service flowrate and temperature is shown in Figures 2a and 2b. These pressure drop expectations are valid at the start of the service run with clean water and a well-classified bed.


**Figure 1a: Backwash Expansion**

Temperature = 10 – 60°C

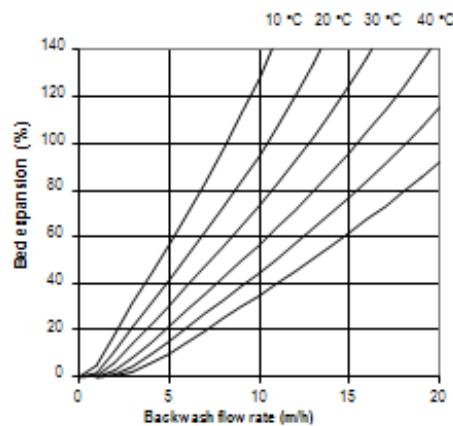


**Figure 2a: Pressure Drop**

Temperature = 10 – 60°C

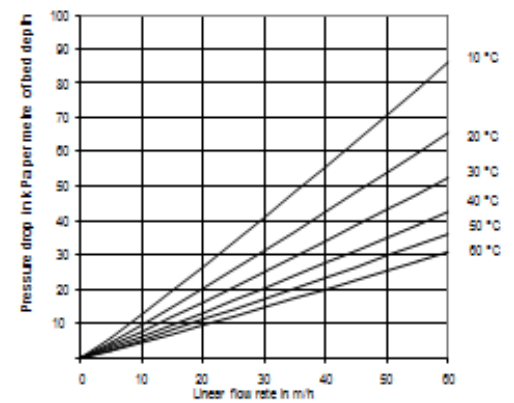


**Figure 1b: Backwash Expansion**

Temperature = 40 – 140°F

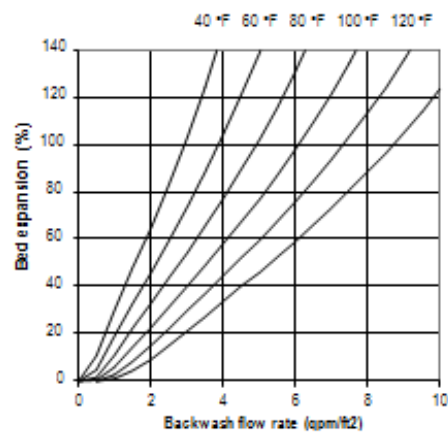

**Figure 2b: Pressure Drop**

Temperature = 40 – 140°F

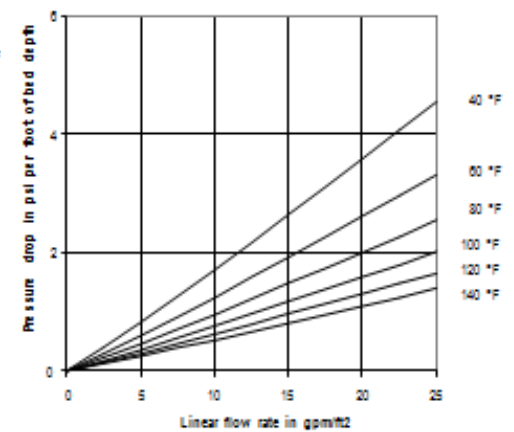

## Conditioning and Limits of Use

AMBERLITE™ PWA5 Ion Exchange Resin is suitable for use in potable water applications <sup>1</sup> after performing a full regeneration cycle at a dosage of 120 g of NaCl per liter of resin, followed by an adequate rinse to remove excess brine.

The operating capacity of AMBERLITE™ PWA5 resin depends on the operating conditions and the feedwater conditions.

<sup>1</sup> Please confirm the regulatory approval in your specific country of use.

## Product Stewardship

DuPont has a fundamental concern for all who make, distribute, and use its products, and for the environment in which we live. This concern is the basis for our product stewardship philosophy by which we assess the safety, health, and environmental information on our products and then take appropriate steps to protect employee and public health and our environment. The success of our product stewardship program rests with each and every individual involved with DuPont products—from the initial concept and research, to manufacture, use, sale, disposal, and recycle of each product.

## Customer Notice

DuPont strongly encourages its customers to review both their manufacturing processes and their applications of DuPont products from the standpoint of human health and environmental quality to ensure that DuPont products are not used in ways for which they are not intended or tested. DuPont personnel are available to answer your questions and to provide reasonable technical support. DuPont product literature, including safety data sheets, should be consulted prior to use of DuPont products. Current safety data sheets are available from DuPont.

Please be aware of the following:

- **WARNING:** Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

## Regulatory Note

This product may be subject to drinking water application restrictions in some countries; please check the application status before use and sale.

### Have a question? Contact us at:

[www.dupont.com/water/contact-us](http://www.dupont.com/water/contact-us)

All information set forth herein is for informational purposes only. This information is general information and may differ from that based on actual conditions. Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where DuPont is represented. The claims made may not have been approved for use in all countries. Please note that physical properties may vary depending on certain conditions and while operating conditions stated in this document are intended to lengthen product lifespan and/or improve product performance, it will ultimately depend on actual circumstances and is in no event a guarantee of achieving any specific results. DuPont assumes no obligation or liability for the information in this document. References to "DuPont" or the "Company" mean the DuPont legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED. No freedom from infringement of any patent or trademark owned by DuPont or others is to be inferred.

DuPont™, the DuPont Oval Logo, and all trademarks and service marks denoted with ™, SM or ® are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted. © 2019 DuPont.

